

## Pyranometer Kipp & Zonen CMP Series S61130 / S61120 / S61110 / S61100

- Measurement of solar irradiance
- Specifications to ISO 9060 and IEC 60904 standards
- Widely used within World Meteorological Organisation scientific programmes



### Description

The Kipp & Zonen range of thermopile-based pyranometers is respected around the world for the measurement of solar irradiance to World Meteorological Organisation and ISO 9060:1990 standards. The instruments are used in meteorological research, solar energy research, material testing, climate control in greenhouses, building physics, science and many other applications.

The CMP series of pyranometers have ergonomic features to facilitate installation, maintenance, and exchange for recalibration.

A waterproof socket is fitted for the signature yellow signal cable, which is available in a range of lengths. The integral bubble level is raised to the top of the housing and can be viewed without removing the sun shield. The screw-in drying cartridge can be reactivated with convenient refill packets.

The CMP10 has internal desiccant that lasts for 10 years. The CMP 11 has a removable drying cartridge. Kipp & Zonen offers 5 years manufacturer's warranty for the CMP10 pyranometer.

### Calculation of irradiance


$$E = U / S$$

**E** [W/m<sup>2</sup>] = Irradiance

**U** [μV] = Output Voltage

**S** [μV/W/m<sup>2</sup>] = Sensitivity

### Dimensional drawings

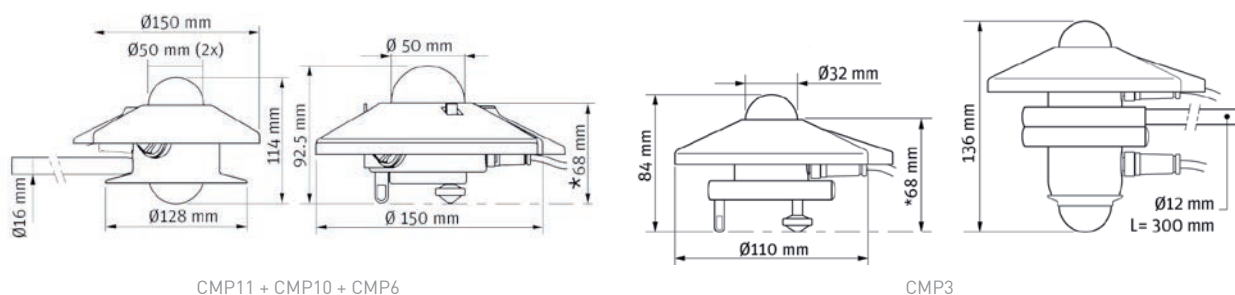

## Pyranometer Kipp & Zonen CMP Series S61130 / S61120 / S61110 / S61100



### Specifications

	CMP11 / CMP10	CMP6	CMP3
Order No.	S61120 / S61130	S61110	S61100
Classification	Secondary Standard, ISO 9060 & WMO	First Class, ISO 9060 & WMO	Second Class, ISO 9060 & WMO
Sensitivity	7 ... 14 $\mu\text{V}/\text{W}/\text{m}^2$ (see calibration protocol)	5 ... 20 $\mu\text{V}/\text{W}/\text{m}^2$ (see calibration protocol)	5 ... 20 $\mu\text{V}/\text{W}/\text{m}^2$ (see calibration protocol)
Spectral range (50% points)	285 ... 2800 nm	285 ... 2800 nm	300 ... 2800 nm
Max. irradiance	4000 $\text{W}/\text{m}^2$	2000 $\text{W}/\text{m}^2$	2000 $\text{W}/\text{m}^2$
Typical signal output for atmospheric applications	0 ... 15 mV	0 ... 20 mV	0 ... 20 mV
Response time (95%)	5 s	18 s	18 s
Zero offset (a) thermal radiation (200 $\text{W}/\text{m}^2$ ) (b) temperature change (5k/hr)	<7 $\text{W}/\text{m}^2$ <2 $\text{W}/\text{m}^2$	<12 $\text{W}/\text{m}^2$ <4 $\text{W}/\text{m}^2$	<15 $\text{W}/\text{m}^2$ <5 $\text{W}/\text{m}^2$
Non-linearity (0 ... 1000 $\text{W}/\text{m}^2$ )	<0.2 %	<1 %	<1 %
Temperature dependence of sensitivity	<1 % (-10 ... +40 °C)	<4 % (-10 ... +40 °C)	<5 % (-10 ... +40 °C)
Level accuracy	0.1°	0.1°	1°
Operating temperature	-40 ... +80 °C	-40 ... +80 °C	-40 ... +80 °C
Cable length	10 m	10 m	10 m
Weight without cable	approx. 0.6 kg	approx. 0.6 kg	approx. 0.3 kg

Delivery includes calibration certificate.

## Pyranometer Kipp & Zonen CMP Series S61130 / S61120 / S61110 / S61100

### Sensor connection to Ammonit Meteo-40 data logger

Sensor	Plug PIN No.	Wire Colour (Kipp & Zonen)	Meteo-40 Voltage	Analog	Supply Sensor
Solar irradiance Output voltage	1	red	Ax		
	2	blue	Bx		
Shield (Housing)					Main Ground (GND)

### Sensor connection diagram to Ammonit Meteo-40 data logger

